


台达 A2/B2 系列伺服电缆线



产品特点

- 电缆外套由低粘性高耐磨损材料制成；
- 具有高抗弯曲强度及高柔韧性；
- 耐油和冷却剂，耐划痕；
- 适用于一般布线场所及拖链。



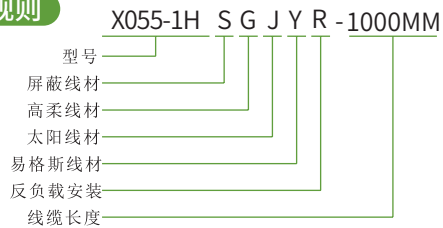
型号对应列表

三铭型号	对应台达型号	对应功率	线缆规格
X055-21	ASD-A2-PW00**	450W 以下	4C*20AWG
X055-21H		450 ~ 750W	4C*18AWG
X055-22		450W 以下	4C*20AWG
X055-22H	ASD-B2-PW00**	450 ~ 750W	4C*18AWG
X055-23		450W 以下	4C*20AWG+2C*24AWG
X055-23H		450 ~ 750W	4C*18AWG+2C*22AWG
X055-24	ASD-A2/A3-PW01**	450W 以下	4C*20AWG+2C*24AWG
X055-24H		450 ~ 750W	4C*18AWG+2C*22AWG
X055-25		450 ~ 750W	4C*18AWG+2C*22AWG
X055-26	ASD-B2-PW01**	50 ~ 750W	2P*24AWG
X055-26H	ASD-A2/A3-PW10**	300 ~ 1000W	4C*17AWG
X055-27	/	1300 ~ 3000W	4C*13AWG
X055-27H	ASD-B2-PW10**	2000 ~ 3000W	4C*13AWG
X055-28	/	3500 ~ 4500W	4C*11AWG
X055-28H	ASD-A2/A3-PW12**	300 ~ 1000W	4C*17AWG+2C*22AWG
X055-29	ASD-A2/A3-PW13**	2000 ~ 3000W	4C*13AWG+2C*20AWG
X055-29H	ASD-B2-PW12**	2000 ~ 3000W	4C*13AWG+2C*20AWG
X055-30	ASD-B2-PW13**	3500 ~ 4500W	4C*11AWG+2C*20AWG
X055-30H	ASD-B2-EN10**	300 ~ 3500W	2P*24AWG

型号对应列表

X055-31	ASD-A2-EN00**	50 ~ 750W	2P*24AWG
X055-32	ASD-A2-EN10**	300 ~ 15000W	2P*24AWG
X055-33	ACS3-CAPW11**	50 ~ 750W	4C*18AWG
X055-34	ACS3-CAEN10**	50 ~ 750W	2P*24AWG
X055-35	ACS3-CAEA10**	50 ~ 750W	3P*24AWG
X055-36	ACS3-CAEN30**	1500 ~ 3000W	2P*24AWG
X055-37	ACS3-CAEA30**	1500 ~ 3000W	3P*24AWG

命名规则



备注：最短线长为 500MM，如需增加以 500MM 为单位递增。
编码器线长度超过 20 米（含 20 米）请联系业务员。
编码器线默认为双绞屏蔽线，无需加 S 或 T。

外形 / 电路图

型号	功能	外形图	电路图
X055-21	A2 动力线		
X055-21H		CN1: C4201H00-2*2PA (插头针: C4201TOP-2)	
X055-22	B2 动力线		
X055-22H		CN1: C4201H00-2*2PA (插头针: C4201TOP-2)	
X055-23	A2/A3 带刹车动力器线		
X055-23H		CN1: C4201H00-2*3PA (插头针: C4201TOP-2)	
X055-24	B2 带刹车动力器线		
X055-24H		CN1: C4201H00-2*3PA (插头针: C4201TOP-2)	
X055-25	B2 编码器线		
X055-26	动力线		
X055-26H		CN1: MS3108B20-18S	
X055-27	动力线		
X055-27H		CN1: MS3108B24-11S	
X055-28	带刹车动力器线		
X055-28H		CN1: MS3108B20-18S	

分类

总线模块

端子台












继电器模组

电缆线

传感器

选型指南

接上表

型号	功能	外形图	电路图
X055-29	带刹车动力器线	 CN1: MS3108B24-11S	
X055-29H			
X055-30	B2 编码器线	 CN1: MS3108B20-29S CN2: Dsub 9P 公头	
X055-31	A2 编码器线	 CN1: 172161-9 (插头针: 170359-1) CN2: 端子: 10120-3000PE 连接器: 10320-52A0-008	
X055-32	A2 编码器线	 CN1: MS3108B20-29S CN2: 端子: 10120-3000PE 连接器: 10320-52A0-008	
X055-33	A3 动力线	 CN1: C4201H00-2*2PA (插头针: C4201TOP-2)	
X055-34	A3 增量式编码器线	 CN1: 172161-9 (插头针: 170359-1) CN2: 55100-0670	
X055-35	A3 绝对值编码器线	 CN1: 172161-9 (插头针: 170359-1) CN2: 55100-0670	
X055-36	A3 增量式编码器线	 CN1: MS3108B20-29S CN2: 55100-0670	
X055-37	A3 绝对值编码器线	 CN1: MS3108B20-29S CN2: 55100-0670	